


OPTIONS AVAILABLE TO MATCH PROCESS REQUIREMENTS




- ❑ Direct discharge from bottom draining vessels with floor mounted models.

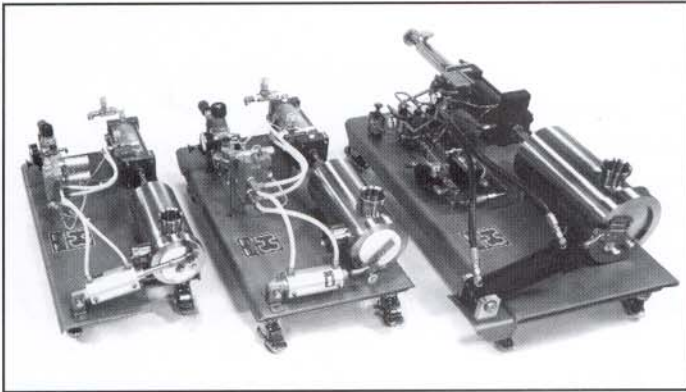

- ❑ Direct dump from tilt cooking/mixing bowl to integral hopper models.




- ❑ Draw from the top of mixing bowls with stand mounted models.

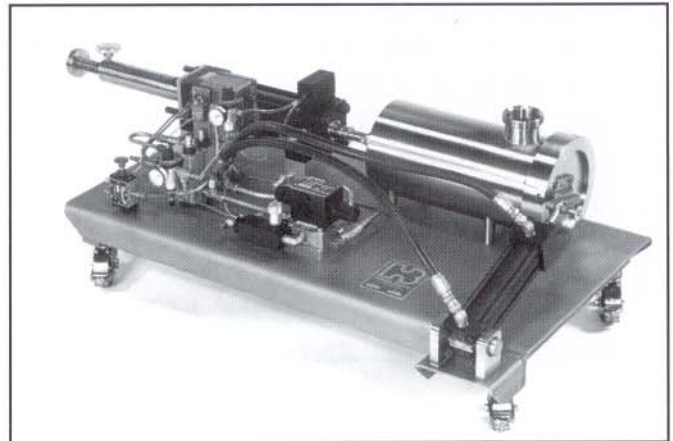

- ❑ Adjustable stroke models for pump/fill applications.

STANDARD MODEL SPECIFICATIONS

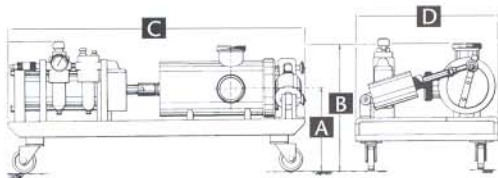

- ❑ Suction and discharge ports are easily reversible.
- ❑ Delrin valve for cold products (20°F - 95°F).
- ❑ Metal valve for hot products (20°F - 220°F).

Model #	MAX GPM	Port Size	A	B	C	D	*Power
P64	25	2.5"	10"	18"	36"	18"	Air/Hydraulic
P128	40	3"	11"	19.5"	38.5"	20"	Air/Hydraulic
P250H	60	3" & 4"	14.8"	18.5"	60"	27.5"	Hydraulic

*Consult factory on Air/Hydraulic requirements.